


DIRECT SUN FEATURE UPGRADES

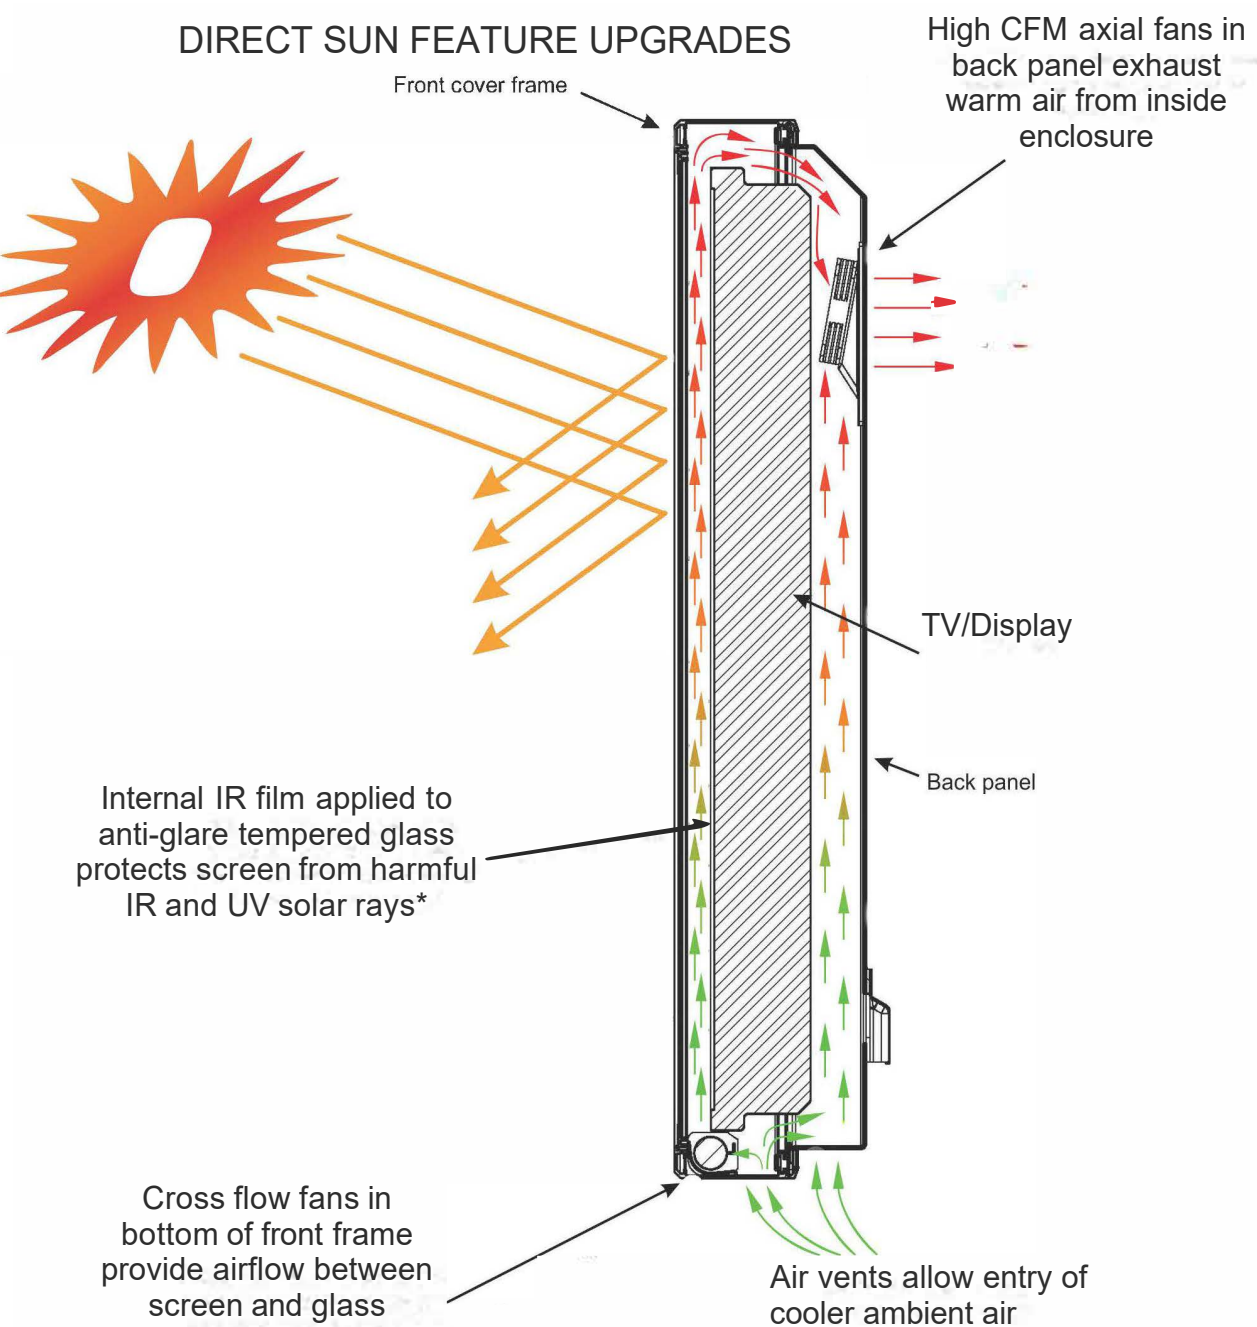

*To maintain the effectiveness of the anti-glare glass and maintain picture quality, the screen must be mounted so that the front of it is between 0.75 in. and 1.20 in. from the glass.