



DS43X

DS75X

DS55X

DS86X

DS65X

DS98X

PRO-X LINE Outdoor Digital Signage Enclosures
Available in Landscape or Portrait

Solutions for Virtually Every Outdoor Viewing Application
Stadiums ■ Theme Parks ■ Resorts ■ Restaurants ■ Sports Bars




Looking for outdoor full sun TV or display solutions? We've got you covered!
Apollo Enclosures delivers innovation, flexibility and the "Lowest Cost" outdoor solutions available!
Contact us for Quote: 888-414-5919 or email sales@apolloenc.com

Features

- All aluminum powder coated construction for durability and style.
- **Anti-glare safety tempered glass with internal IR film shields TV from harmful UV and IR rays while reducing solar loading of direct sun on displays.**
- Tight Seal technology seals your TV against rain, insects, and dust.
- Thermostatically controlled and filtered air-flow system protects TV/displays up to 122° F (50°C)
- **Additional Cross flow fans in front cover stream airflow between TV and glass to further protect TV**
- Down-facing sound ports maximizes TV audio from back and down firing speakers.
- Watertight cable cover protects cable connections to our TV inputs and outputs.
- Internal 3-outlet power bank powers fans, TV/display and one auxiliary plug for media accessories.
- 9' outdoor rated power cord for safe outdoor installation.
- EZ mount internal TV swing brackets for simplified installation and easy cable management.
- 1' extension power cord to accommodate internal connection of power packs or right-angle plugs.



Complies with:
UL/CSA 60950-1
UL/CSA 60950.22

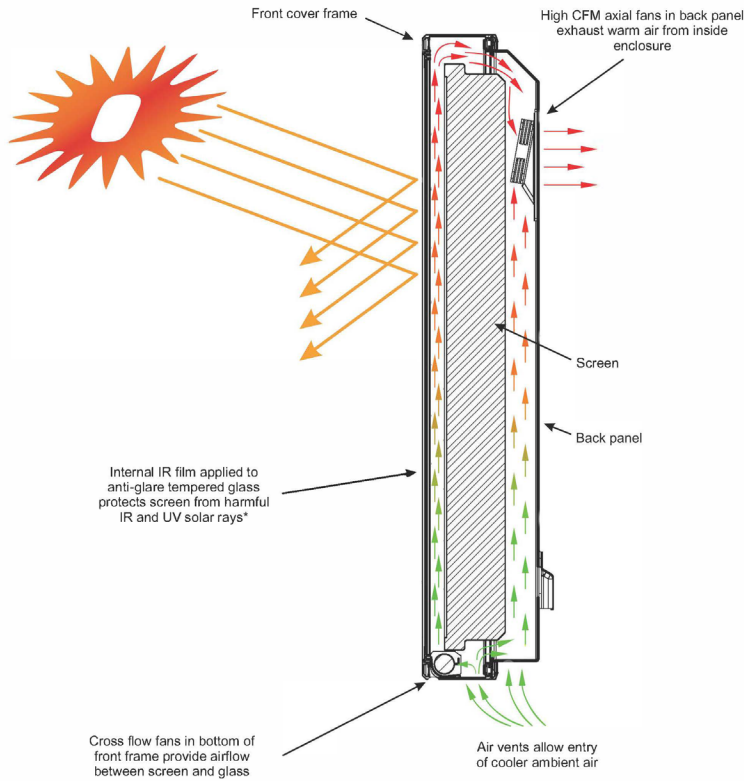

Specifications

*To maintain the effectiveness of the anti-glare glass and maintain picture quality, the screen must be mounted so that the front of it is between 0.75 in. and 1 in. from the glass.

	DS43X (L/P)	DS55X (L/P)	DS65X (L/P)	DS75X (L/P)	DS86X (L/P)	DS98X (L/P)
Fits TV Sizes	39" – 43"	49" – 55"	60" – 65"	70" – 75"	80" – 86"	90" – 98"
Max TV Dims to fit	38.5 x 23 x 3.2	49 x 29 x 3.0	58 x 34 x 3.0	66.5 x 38.3 x 2.8	76.3 x 43.9 x 3.0	86.5 x 49.3 x 3.3
Enclosure Dimensions	41.1 x 25.8 x 5.8	51.4 x 31.1 x 5.8	61.1 x 36.9 x 5.8	69.9 x 42.4 x 5.8	80.0 x 47.6 x 6.12	90.7 x 53.9 x 6.4
Enclosure Weight	36.75 lbs (16.67 kgs)	47 lbs (21.32 kgs)	65.43 lbs (29.68 kgs)	81.55 lbs (36.99 kgs)	113.45 lbs (51.46 kgs)	180.3 lbs (81.78 kgs)
Shipping Dimensions	45 x 30 x 10	56 x 37 x 10	66 x 41 x 10	74 x 45.75 x 10	84.5 x 52.5 x 10	95 x 59 x 11
Shipping Weight	43.85 lbs (19.89 kgs)	56.5 lbs (25.63 kgs)	77.13 lbs (34.99 kgs)	96.15 lbs (43.62 kgs)	133.15 lbs (60.39 kgs)	207.5 lbs (94.12 kgs)
Power Requirements	110/240 VAC	110/240 VAC	110/240 VAC	110/240 VAC	110/240 VAC	110/240 VAC

Optional Accessories

Weatherproof Mounts	AWM407 – Dual Arm Articulating Wall Mount WM607NA - Non-Articulating Wall Mount with Tilt CM708 - Adjustable Height Ceiling Mount	AWM407 WM607NA	WM808NA-HD Heavy Duty Non-articulating wall mount	WM607NA (2 required)
Heater Modules	HM200i	HM200i	HM200i	HM200i-D (Dual Heaters)
			HM200i-D (Dual Heaters)	HM200i-D (Dual Heaters)